

**Specifications**  
Description AJP28B

Shielded  
10 positions

Technical Data AJP28B

Electrical: UL applications: 250 volts AC max at 2 amps

Dielectric withstanding voltage: 500 volts AC

Insulation resistance: 500 megohms

Termination: resistance 35 milliohms max after environmental testing

Mechanical: Cable-to-plug tensile strength: 20lbs min

Durability: 2000 mating cycles



Material & Finish: Housing: polycarbonate, UL94V-2

Color: clear

Contact blade: phosphor bronze


Conductor: stranded, 24, 26, 28 AWG

Plating: 30u" gold

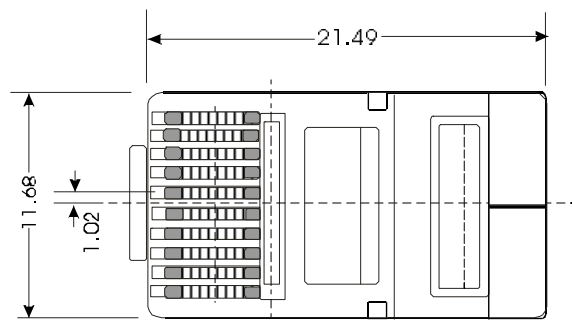

Ordering Information

AJP28B	A	A	X	3	1	2	9
Type	Positions	Contacts	Wire Type	Plating			
	10 (A)	10 (A)	1=Flat 2=Round	1=30u" 3=30u"			
				1=Stranded Wire 2=94V2 Plastic Type 2=Shielded			

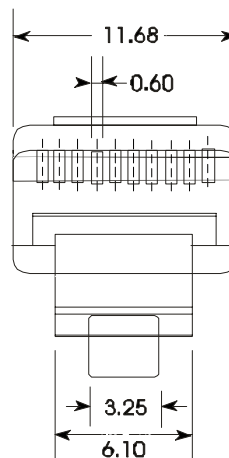

<b>RIA</b> CONNECT	P/N: AJP28BAAX3-129
Desc.: Shielded plug	
Date: 9-23-08 Dimensions in mm	Drawn By: Donna Mears Verified By: Mike Balekdjian