

## DCT90HIRK2

Dual Clamp Tie 150 lb, Stud Dia .25" Length 13" Max Bun Dia 1.3" Width .5"

PA66HIRHS, Black 50/pkg

Article Number: 115-30900

Part Number: DCT90HIRK2

Type: DCT9

Material: PA66HIR



### 1. Base Data

---

<b>Part No.</b>	DCT90HIRK2
-----------------	------------

<b>Type</b>	DCT9
-------------	------


<b>Color</b>	Black (BK)
--------------	------------

<b>Features</b>	HellermannTyton's dual clamp ties are designed to provide parallel separation between hoses, wires, cables and tubing, protecting them from abrasion. These ties have an optional mounting hole for securing bundles along the chassis of trucks, trailers, and
-----------------	---

## Application

Primarily designed for use in the automotive/truck industry, these parts can be used in a wide variety of industries and applications where 6mm/9mm weld studs or 6mm/9mm ISO bolts are used and cables need to be bundled and secured.

## 2. Product Dimensions

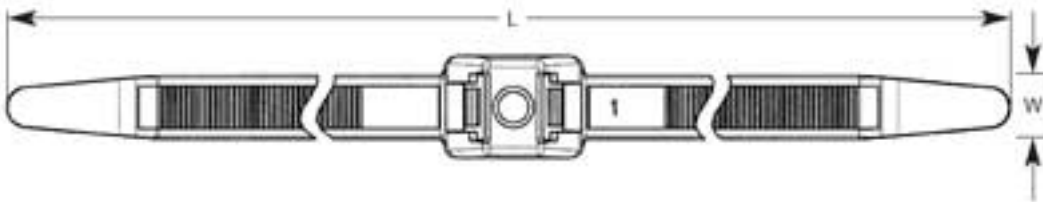

**Min. Tensile Strength** 150 lbs / 670 N

**Length (L)** 13 " / 330 mm

**Width (W)** .5 " / 12.7 mm

**Height (H)** 19.3 mm

**Max. Ø Bundle** 1.3 " / 33.0 mm

**Stud Ø** .25 " / 6.35 mm

## 4. Material and Specifications

**Material** Polyamide 6.6 high impact modified (PA66HIR)

**Material Shortcut** PA66HIR

**Flammability** UL94 HB

**Operating Temperature** -40 °F to +230 °F (-40 °C to +110 °C) continuous

## Logistic and Packaging

---

**Packaging Type** bag

**Pkg. Qty.** 50

**Carton Qty.** 500

**EAN code** 4031026108605

**UPC** 08930617087

# Bundle Separation Products

## Dual Clamp Ties


HellermannTyton's dual clamp ties are designed to provide parallel separation between hoses, wires, cables and tubing, protecting them from abrasion. These ties have an optional mounting hole for securing bundles along the chassis of trucks, trailers, and heavy duty equipment. The unique, one-piece design features the dual head centered on the strap.

Available in two lengths, the dual clamp ties accommodate bundles ranging from .25 inches to 2.3 inches. The flexible wide straps minimize pinching of hoses and convoluted tubing. The straps are also releasable.



U.S. Patent Number 5,966,781

Material Data	
Material	Polyamide 6.6 impact modified, Heat Stabilized, UV Resistant (PA66HIRHS)
Operating Temperature	-40 °F to +230 °F (-40 °C to +110 °C) continuous
Flammability	UL94 HB

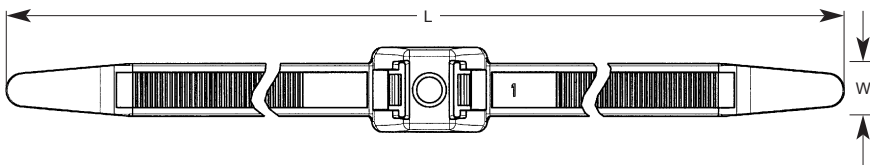

Product Selection			Stud Ø	Min. Tensile Strength	Length (L)	Max. Ø Bundle (each side)	Width (W)	Color	Pkg. Qty.
Article No.	Part No.	Type							
115-30900	<b>DCT90HIRK2</b>	DCT9	.25" (6.35)	150 lbs (670)	13.0" (331)	1.3" (33.02)	.50" (12.7)	Black	50
115-00034	<b>DCT90HIRC2</b>	DCT9	.25" (6.35)	150 lbs (670)	13.0" (331)	1.3" (33.02)	.50" (12.7)	Black	100
115-31100	<b>DCT110HIRK2</b>	DCT11	.25" (6.35)	150 lbs (670)	19.2" (489)	2.3" (58.42)	.50" (12.7)	Black	50
115-00033	<b>DCT110HIRC2</b>	DCT11	.25" (6.35)	150 lbs (670)	19.2" (489)	2.3" (58.42)	.50" (12.7)	Black	100

Installation tools - MK9, MK9HT, MK9P. Dimensions are approximate and subject to technical changes. Use **Part No.** for ordering and **Type** for specification purposes.